

कार्यालय, नगर पालिक निगम, कोरबा (छत्तीसगढ़)

फा.क. 2157 / 2025

सिस्टम टेंडर नं. 178933

कोरबा दिनांक 07.11.2025

द्वितीय ई-निविदा आमंत्रण सूचना

कार्यालय नगर पालिक निगम, कोरबा द्वारा लोक निर्माण विभाग एकीकृत पंजीयन प्रणाली अंतर्गत सक्षम श्रेणी में पंजीकृत ठेकेदारों से प्रमुख अभियंता लोक निर्माण विभाग, रायपुर द्वारा भवन कार्य हेतु दिनांक 01.01.2015 एवं विद्युत हेतु (दिनांक 01.06.2020) से प्रभावशील दर अनुसूची पर (निविदा खुलने के दिनांक तक समस्त संशोधनों के साथ शेड्यूल अनुसार प्रतिशत दर पर ई-प्रोक्युरमेंट (E-Tendering) के माध्यम से निविदा प्रपत्र Form-A में निविदा आमंत्रित की जाती है:-

1. फिजिकल सबमिशन लिफाफा प्राप्त होने की अंतिम तिथि — 26.11.2025 सायंकाल से 3.00 वजे तक
2. निविदा खुलने की अंतिम तिथि — 26.11.2025 सायंकाल 4.00 वजे से

क.	कार्य का नाम	प्रावकलन राशि (लाख में)	धरोहर राशि (FDR/TDR)	कार्यावधि	निविदा प्रतिभागी शुल्क (डिमांड ड्राफ्ट)	ठेकेदार का वर्ग	निविदा खुलने की तिथि
1	नगर पालिक निगम कोरबा क्षेत्रांतर्गत बालको जोन अंतर्गत 11 शासकीय स्कूलों में किचन शेड का निर्माण कार्य (जि.ख.न्या. मद)	43.00	32500/-	06 माह	1500/-	वर्ग डी एवं प्रवर श्रेणी	26.11.2025 से

शर्त:-

1. निविदा दरे प्रचलित सी.एस.आर.से कम या अधिक प्रतिशत दरों पर दिया जावे सी.एस.आर.के अंतर्गत के आयटमों पर पृथक से आयटम दरों का उल्लेख करने पर निविदा निरस्त मानी जावेगी
2. जिन ठेकेदारों द्वारा नगर पालिक निगम (साडा) के किसी ठेके के कार्य में अनुबंध के अनुरूप कार्य न किया गया हो अथवा नगर पालिक निगम (साडा) के हित के विरुद्ध कार्य किया गया हो उन्हें निविदा भरने की पात्रता नहीं होगी।
3. इच्छुक ठेकेदारों को उचित वर्ग में पंजीयन की प्रमाणित प्रतिलिपि यदि साझेदारी फर्म हो तो उसका प्रमाण पत्र (पार्टनरशीप डीड) की सत्य प्रतिलिपि, उपलब्ध तकनीकी अमले की जानकारी, विगत 3 वर्षों का आयकर चुकता प्रमाण पत्र, पेन नम्बर, वैध जी.एस.टी. पंजीयन प्रमाण पत्र एवं अमानत राशि के FDR/TDR की प्रति ऑनलाईन अपलोड करना अनिवार्य होगा, प्रशिक्षित यंत्री नियुक्त करने संबंधी प्रमाण पत्र, कर्मचारी भविष्य निधि रायपुर से पंजीकरण का कोड, निविदा प्रतिभागी शुल्क का डिमांड ड्राफ्ट एवं धरोहर राशि FDR/TDR, शपथपत्र का स्कैन कापी ऑन लाईन सिस्टम पर अपलोड करना अनिवार्य होगा।
 - अमानत राशि का वैध FDR/TDR, निविदा प्रतिभागी शुल्क का डिमांड ड्राफ्ट एवं निर्धारित प्रारूप में शपथ पत्र की मूल प्रति लिफाफा में कार्य का नाम एवं अन्य विवरण अंकित कर केवल स्पीड पोस्ट/रजिस्टर्ड डाक के माध्यम से आयुक्त, नगर पालिक निगम, कोरबा साकेत भवन, आई.टी.आई.चौक रामपुर कोसावाड़ी पिन- 495677 कोरबा के पते पर भेजना होगा। निर्धारित तिथि को सायं 03:00 बजे के पश्चात् फिजिकल सबमिशन लिफाफा स्वीकार नहीं किया जायेगा।
 - निविदाकार को प्रत्येक निविदा में पंजीयन क्षमता के अंतर्गत वर्तमान में नगर निगम या अन्य विभागों में उनके द्वारा किये जा रहे कार्यों का विवरण राशि सहित मूलप्रति में निर्धारित प्रारूप में वैध शपथपत्र (राशि रु. 100/- नॉनज्यूडिशियल स्टाम्प) निविदा आमंत्रण दिनांक के पश्चात का, निविदा क्रमांक एवं कार्य का नाम अंकित करना अनिवार्य होगा।
 - अमानत राशि का FDR/TDR एवं निविदा प्रतिभागी शुल्क का डिमांड ड्राफ्ट जो कि आयुक्त, नगर पालिक निगम, कोरबा के नाम पर देय हो प्रस्तुत करना अनिवार्य होगा।
4. सम्पूर्ण किये गये कार्यों के लिए प्रत्येक चल देयकों में से 5 प्रतिशत सुरक्षा राशि 01 वर्ष के लिए एवं मरम्मत एवं संधारण मद को छोड़कर शेष कार्यों में 5 प्रतिशत परफार्मेंस सिक्यूरिटी की गारंटी के रूप में से 03 वर्ष के लिए रोकी जावेगी। सुरक्षा राशि एवं परफार्मेंस गारंटी राशि वापसी हेतु समयावधि की गणना कार्य पूर्णता तिथि से किया जायेगा। उक्त समयावधि में निर्माण कार्य की भौतिक स्थिति सही होने तथा सक्षम प्राधिकारी के संतुष्टि के आधार पर भुगतान किया जायेगा।
5. जिन निविदाकारों द्वारा कर्मचारी भविष्य निधि संगठन (वर्तमान तक वैधता) एवं कर्मचारी राज्य बीमा निगम, रायपुर से पंजीयन कराकर कोड प्राप्त कर लिया हो वे निविदाकार ही निविदा हेतु पात्र होंगे एवं कर्मचारी भविष्य निधि संगठन (ई.पी.एफ.) एवं विभिन्न प्रावधानों को धारा 1952 के तहत निविदाकार का जीवित पंजीयन होना आवश्यक है साथ ही निविदा आमंत्रण दिनांक से विगत तीन माह की अवधि में जमा किये गये TRRN Payment Detail चालान की प्रति प्रस्तुत करना तथा ऑनलाईन अपलोड किया जाना अनिवार्य होगा।
6. निविदा में भाग लेने वाले ठेकेदारों को छ.ग. भवन और अन्य सन्निर्माण कर्मकार (नियोजन एवं सेवा शर्तों का विनियमन) अधिनियम 1996 एवं तदंतर्गत निर्धारित नियमों के तहत पंजीयन कराना आवश्यक होगा तथा निर्माण लागत का 1 प्रतिशत उपकर के रूप में प्रत्येक देयक से कटौती की जावेगी।
7. ईट से संबंधित निर्माण कार्यों में पलाई एश ब्रिक का उपयोग किया जाना अनिवार्य होगा।
8. प्रयुक्त लोहा का विल एवं टेस्ट रिपोर्ट तथा प्रयुक्त सीमेंट का विल संलग्न करना अनिवार्य होगा।
9. निविदा दरों असामान्य कमी प्रतीत होने पर सफल निविदा दाता से अनुबंध के पूर्व एस.ओ.आर. एवं निविदा दर की अंतर की राशि के समतुल्य परफार्मेंस गारंटी के रूप में राष्ट्रीयकृत बैंक एफ.डी.आर., पोस्ट ऑफिस, टाईम डिपॉजिट अथवा एन.एस.सी. जो कि आयुक्त नगर पालिक निगम, कोरबा के नाम पर देय होगा जो मांग तिथि से 15 दिवस के भीतर जमा करना अनिवार्य होगा। उपरोक्त राशि समयावधि में जमा न करने की दशा में निविदा स्वमेव निरस्त मानी जावेगी।
10. निविदा अहस्तांतरणीय होगा एवं सशर्त निविदाओं पर विचार नहीं किया जावेगा।
11. निविदा प्रपत्र फार्म -ए की कंडिका 11 Price Adjustment (एरकलेशन) देय नहीं होगा।
12. निविदा के संबंध में किसी प्रकार की विवाद होने की स्थिति में आयुक्त का निर्णय अंतिम एवं सर्वमान्य होगा।
13. निविदा स्वीकृत करने अथवा अस्वीकृत करने अथवा निरस्त करने का अधिकार नगर पालिक निगम के पास सुरक्षित रहेगा।
14. उपरोक्त निविदा सूचना की विस्तृत प्रति नगर पालिक निगम, कोरबा के साकेत भवन स्थित निर्माण शाखा से प्राप्त किये जा सकते हैं।
15. ठेकेदार द्वारा संपादित किए गए कार्यों के देयकों का भुगतान कार्य विशेष हेतु बजट आवंटन एवं राशि उपलब्ध होने पर किया जाएगा।
16. निविदा में सफल निविदाकार को ऐसे कार्य जिसकी अनुबंध राशि 10.00 लाख या उससे अधिक है, उनको प्रत्येक कार्यों हेतु पृथक से छ.ग. भवन और सन्निर्माण कर्मचार मण्डल का पंजीयन प्रमाण पत्र प्रस्तुत करना अनिवार्य होगा अन्यथा देयक भुगतान किया जाना संभव नहीं होगा।
17. कार्य क्रियान्वयन से संबंधित गुणवत्ता परीक्षण संबंधी रिपोर्ट पर होने वाले व्यय का वहन संबंधित ठेकेदार द्वारा किया जावेगा।
18. ठेकेदार को निर्माण कार्य के दौरान "निर्माण एवं अपशिष्ट प्रबंधन नियम 2016" में किये गए प्रावधानों का पालन करना अनिवार्य होगा।

प्रतिलिपि-

प्रोग्रामर, संचालनालय, नगरीय प्रशासन एवं विकास विभाग, रायपुर को uad.cg.gov.in में अपलोड करने हेतु प्रेषित।

कार्यालय अभियंता

नगर पालिक निगम

कोरबा (छ.ग.)

Date-Time Detail(s)

Seq. No.	Nagar Nigam Stage	Contractor Stage	Start		Expiry		Remarks
			Date	Time	Date	Time	
1	Release Tender		07.11.2025	15.30	07.11.2025	15.30	Release Tender
2		Bid Submission	07.11.2025	15.30	24.11.2025	17.30	
3		Physical Document Submmission	07.11.2025	15.30	26.11.2025	15.00	
4	Tender Open		26.11.2025	16.00	--	--	


EXECUTIVE ENGINEER
KORBA (CG)
For, Commissioner Korba (C.G.)

OFFICE OF THE MUNICIPAL CORPORATION, KORBA (C.G.)

DETAIL ESTIMATE

**Work :- Construction of Kitchen Shade At 06 Nos Govt. School Under Balco Zone, Nagar Palik
Korba. (Part-A)**

Source :- Schedule of Rates Public Works Department [PWD BUILDING 01-01-2015] and [PWD ELECTRICAL 01-06-

No.	ITEM DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
1	Excavation for All Types and sizes of foundations, trenches and drains or for any other purpose including disposal of excavated stuff upto 1.5 m lift and lead upto 50m (at least 5m away from the excavated area), including dressing and								
	In All Types of soils.								
	column	4	1.20	1.20	1.20	6.91			
	below pb	2	3.40	0.30	0.30	0.61			
		2	1.70	0.30	0.30	0.31			
		2	3.70	0.30	0.30	0.67			
	step	1	2.00	0.30	0.30	0.18			
		1	1.20	0.90	0.30	0.32			
	deduction column	-4	0.30	0.20	0.30	-0.07			
						8.93	CUM	185.00	1651.68
2	Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20 cm in depth consolidating each deposited layer by ramming and watering, including								
	column	4	1.20	1.20	0.10	0.58			
	below pb	2	3.40	0.30	0.10	0.20			
		2	1.70	0.30	0.10	0.10			
		2	3.70	0.30	0.10	0.22			
	step	1	2.00	0.30	0.10	0.06			
		1	1.20	0.90	0.10	0.11			
	deduction column	-4	0.30	0.20	0.10	-0.02			
						1.25	CUM	371.00	463.01
3	Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of								
	1:4:8 (1 cement : 4 coarse sand : 8 graded stone Aggregate 40mm nominal								
	i								
	column	4	1.20	1.20	0.10	0.58			
	below pb	2	3.40	0.30	0.10	0.20			
		2	1.70	0.30	0.10	0.10			
		2	3.70	0.30	0.10	0.22			
	step	1	2.00	0.30	0.10	0.06			
		1	1.20	0.90	0.10	0.11			
	deduction column	-4	0.30	0.20	0.10	-0.02			
						1.25	CUM	2659.00	3318.43
ii	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone Aggregate 20mm nominal								
	Plinth Protection Work	2	3.40	1.00	0.10	0.68			
		2	3.70	1.00	0.10	0.74			
						1.42	CUM	4073.00	5783.66


	ITEM DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	and laying nominal mix concrete with crushed aggregate using concrete mixer in works upto plinth level excluding cost of 1½:3 (1 cement : 1½ coarse sand : 3 graded stone Aggregate 20 mm nominal size).								
		4	1.00	1.00	0.30	1.20			
		4	0.80	0.80	0.40	1.02			
	UPTO PLINTH	4	0.30	0.20	1.00	0.24			
	PLINTH BEAM	1	14.20	0.20	0.30	0.85			
	ABOVE PLINTH	4	0.30	0.20	3.50	0.84			
	LINTEL BEAM	1	14.20	0.20	0.20	0.57			
	CHAJJA	4	1.80	0.60	0.15	0.65			
	PLATFORM	1	10.00	0.60	0.15	0.90			
	SLAB BEAM	1	14.20	0.20	0.30	0.85			
	SLAB	1	3.70	4.00	0.130	1.92			
						9.05	CUM	4163.00	37666.82
5	Extra for laying PCC/RCC of any grade in superstructure above plinth level for every floor or part thereof in addition to rate for foundation and plinth					10.66	CUM	97.50	1039.35
6	Providing and placing in position reinforcement for R.C.C. work including straightening, cutting, bending, binding etc. complete as per drawings including cost of binding wire in foundation and								
	Thermo-Mechanically treated bars FE 415	9.05			100.00	904.80	Kg	54.50	49311.60
7	Providing and fixing form work including centring, shuttering, strutting, staging, propping bracing etc. complete and including its removal At All levels, for:								
a	Foundations, footings, bases of columns plinth beam, curtain wall in any shape and	4	1.00	-	0.30	1.20			
		4	0.80		0.40				
		4	1.00	-	1.00	4.00			
		2	14.20		0.30	8.52			
						13.72	sqm	139.00	1907.08
b	Columns, Pillars, Piers and likes-rectangular or square in shape								
		4	1.00		3.50	14.00			
						14.00	sqm	297.00	4158.00
c	Beams, lintels, cantilevers & walls	2	14.20		0.30	8.52			
		2	14.20		0.30	8.52			
						17.04	sqm	202.00	3442.08
d	Suspended floors, roofs, access platform, balconies (plain surfaces) and shelves	1	3.70	4.00		14.80			
		1	10.00	0.60		6.00			
		1	10.00		0.15	1.50			
						20.80	sqm	235.00	4888.00
e	Edge of slab, breaks in floor and walls upto 200mm.	1	15.40			25.00	metre	34.00	850.00
f	Weather shade, chhajja, Cornices and mouldings	1	14.20	0.60		8.52	sqm	294.00	2504.88


	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	with modular fly-ash lime bricks (bricks) confirming to IS:12894- class designation 4.0 in foundation and plinth in:								
	Cement Mortar 1:6 (1 cement : 6 coarse sand)	1	14.20	0.30	0.40	1.70			
		1	14.20	0.20	2.10	5.96			
	platform	1	14.20	0.20	0.90	2.56			
	stair	1	10.00	0.20	0.60	1.20			
		3	2.00	0.30	0.15	0.27			
	deduction	1	15.40	0.20	0.30	0.92			
	DOOR								
	WINDOW	-1	1.20	0.20	2.10	-0.50			
	VENTILATOR	-4	1.20	0.20	1.20	-1.15			
		-4	0.90	0.45	1.20	-1.94			
						9.02	CUM	3263.00	29425.73
9	Extra for brick work in superstructure above plinth level for every floor or part thereof in addition to rate for foundation								
						9.44			
						9.44	CUM	121.00	1142.72
10	Providing and fixing steel door/ window with M.S. sheet 1mm thick, frame of angle iron, diagonal braces of angle/ flat iron of suitable size, 3.00 mm M.S. gusset plates at junctions and corners, all necessary fittings complete including applying a priming coat of red oxide zinc chromate								
	door	1	1.20	2.10	40.00	100.80			
	window	4	1.20	1.20	40.00	230.40			
						331.20	kg	75.00	24840.00
11	Providing and fixing M.S. grill of approved pattern made of M.S. flats or square or round bars welded to steel frame of windows etc. including applying a priming coat welded to frame with all necessary fitting complete including applying a priming of red oxide zinc chromate primer								
	window	3	1.20	1.20	20.00	86.40			
		4	0.60	0.45	15.00	16.20			
						102.60	kg	67.50	6925.50
12	Providing and making 12mm thick cement plaster of mix:								
	In Cement Mortar 1:6 (1 cement : 6 fine sand)	1	14.20		3.20	45.44	sqm	91.50	4157.76
13	Providing and making 15mm thick cement plaster on the rough side of single or half brick wall of mix:								
	In Cement Mortar 1:6 (1 cement : 6 fine sand)	1	14.20		3.60	51.12	sqm	107.00	5469.84
14	Providing and applying 2mm thick ready mix exterior grade approved make putty (like Birla wall care, Alltek Superfine W/R of (NCL), Asian, ICI, Nerolac, J.K. wall putty) on walls to make the surface smooth and even					96.56	sqm	94.50	9124.92

	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	Painting with acrylic luxury (plastic) paint of required shade on even shade.								
	new work (two or more coats)					45.44	sqm	52.50	2385.60
16	Painting exterior surface with ACRYLIC SMOOTH exterior paint of required shade as per manufacturer's specifications to give protective and decorative finish including cleaning washing of surface etc.								
	On new work (Two or more coats applied @ 1.43 ltr/ 10 sqm over and including					51.12	sqm	56.00	2862.72
17	Painting on new work (two or more coats) to give an even shade with								
	Satin Synthetic Enamel Paint	2	1.20	2.10		5.04			
		4	1.00	2.10		8.40			
		3	1.50	1.20		5.40			
		4	1.20	1.20		5.76			
		4	0.60	0.45		1.08			
						25.68	sqm	55.00	1412.40
18	Providing and laying vitrified floor tiles with double charge/ multi charge printing with water absorption less than 0.5% and conforming to IS : 15622 of approved make in all colours and shades and size mentioned below (+/- 10mm), laid on 20mm thick cement mortar 1:4 (1 cement								
	Size 600x600mm	1	3.00	3.70		11.10			
		1	14.20		0.80	11.36			
						22.46	sqm	963.00	21628.98
19	15mm thick Granite work (machine cut, table rubbed & mirror polished) for kitchen platform, vanity counters, window sills and similar locations of required size laid over 20mm thick base cement mortar 1:4 (1 cement : 4 coarse sand) including joints								
	Granite stone black	1	10.00	0.60		6.00			
		1	10.00	0.15		1.50			
						7.50	sqm	3279.00	24592.50
20	Providing and fixing ceramic glazed wall tiles conforming to IS : 15622 of approved make, colours, shades and size on wall and dados over 12 mm thick bed of cement Mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm including pointing in								
	Size upto 200x300mm	1	12.00		1.20	14.40	sqm	587.00	8452.80
21	12.37Chequerred precast cement concrete tiles 22mm thick in footpath & courtyard jointed with neat cement slurry mixed with pigment to match the shade of tile including cleaning of joint etc complete on 20 mm thick bed of cement mortar 1:4								
	Medium shade using approximately. 50% white cement and 50% ordinary	3	7.00	0.30		6.30			
		3	7.00		0.15	3.15			
						9.45	sqm	591.00	5584.95

	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	4/8) wash basin with C.I. 32 mm C.P. brass waste of pattern, including painting of s, cutting and making good the walls wherever required :								
	Size 510x410 mm	1				1.00	each	4095.00	4095.00
23	19.13 Providing and fixing 15 mm nominal bore Brass bib/stop cock of approved quality:								
i	Bib cock (350 grams)					1.00	each	237.00	237.00
ii	Piller Cock (400 grams)					1.00	each	398.00	398.00
24	Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete 20 mm nominal bore					1.00	each	394.00	394.00
25	Providing and fixing stainless steel drain jali of approved make/quality.					1.00	each	51.00	51.00
26	Providing and fixing on wall face or under floor UV stabilized Unplasticised Rigid PVC pipes (single socketed) having 3.2mm wall thickness conforming to IS : 13592 (4kg/sqcm) including required couplers, jointing with seal ring 110 mm dia pipe.					12.00	metre	267.00	3204.00
27	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC CONCEALED WORK including cutting chases and making good the walls etc.								
	25 mm nominal outer dia .Pipes	1	17.00			17.00	metre	213.00	3621.00
	20 mm nominal outer dia .Pipes.	1	15.00			15.00	metre	167.00	2505.00
28	Providing and placing on terrace (at all floor levels) polyethylene water storage tank ISI : 12701 marked with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the	1	1000.00			1000.00	litre	7.30	7300.00
								TOTAL	286796.02
								For Electrification Work (P.W.D. Electrical Sor 01.06.2020)	10632.72
								Writing Board	2500.00
								TOTAL AMOUNT	299928.74
								Say As Ammount	300000.00
								06 Nos X 300000.00=	1800000.00


 Sub Engineer
 Municipal Corporation
 Korba (C.G.)


 Asst. Engineer
 Municipal Corporation
 Korba (C.G.)

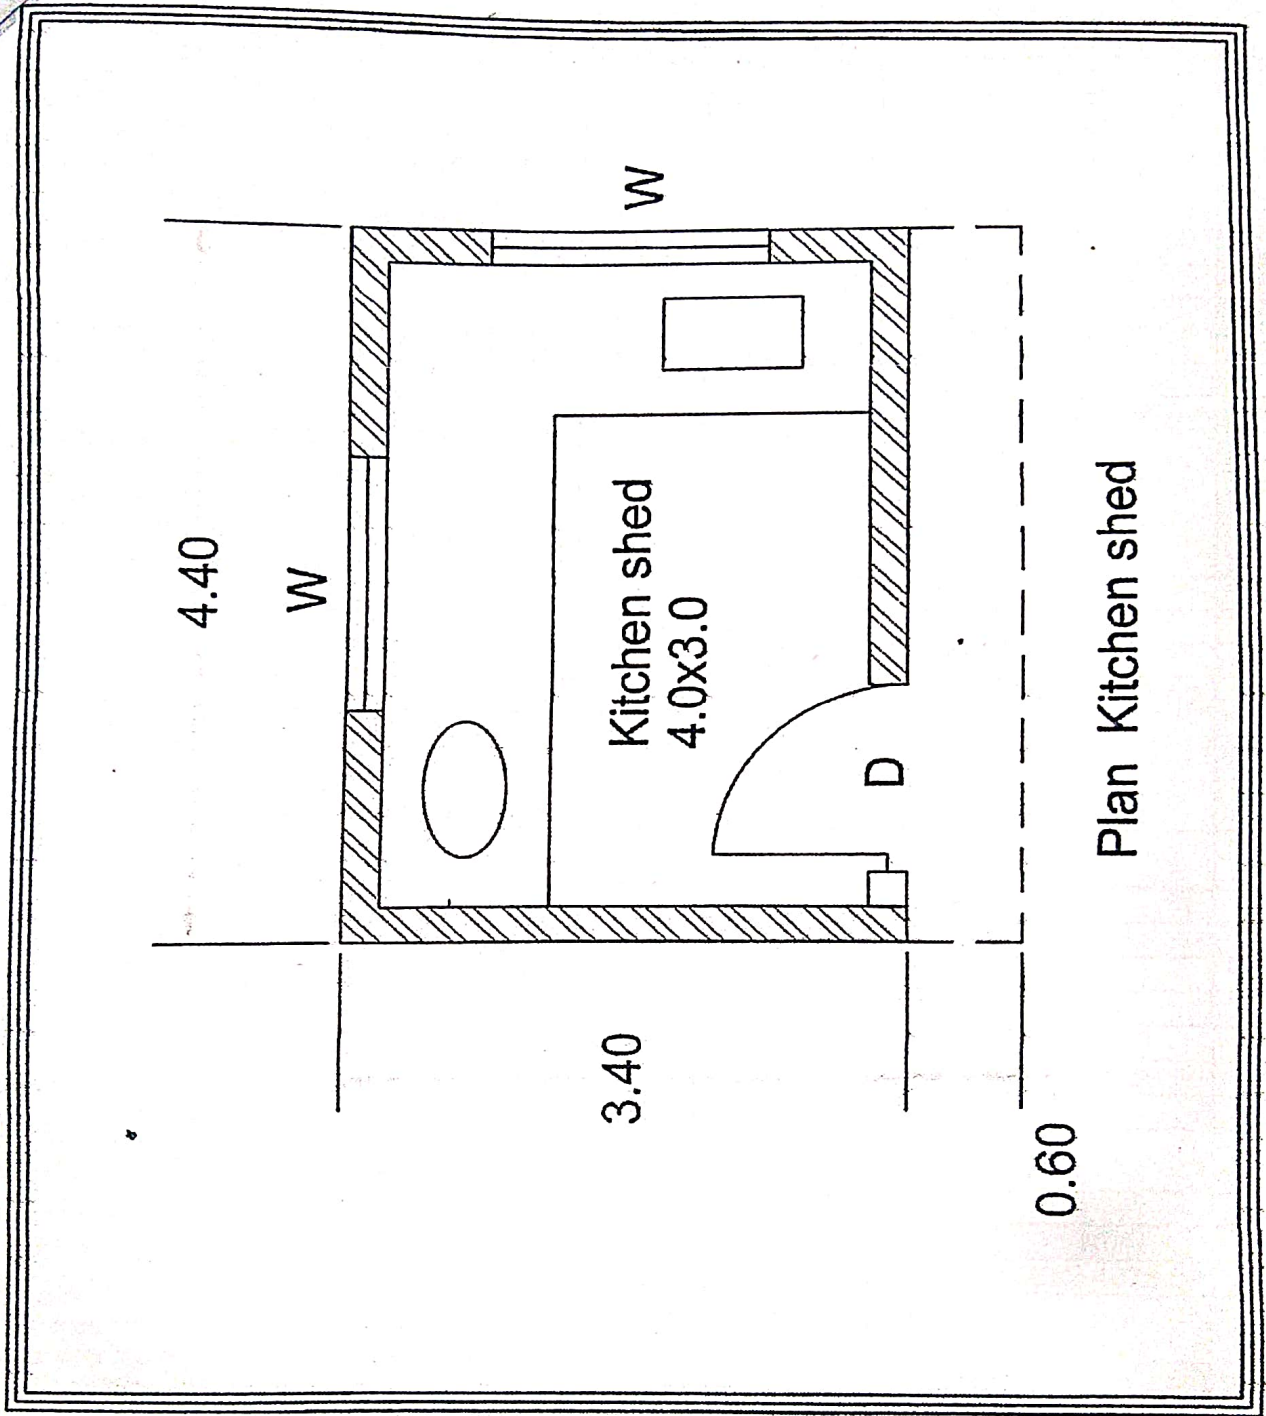

Handwritten signature or initials.

Handwritten signature or initials.

OFFICE OF THE MUNICIPAL CORPORATION, KORBA (C.G.)

DETAIL ESTIMATE

Work :- Construction of Kitchen Shade At 05 Nos Govt. School Under Balco Zone, Nagar Palik

Part-B)

Sor :- Schedule of Rates Public Works Department [PWD BUILDING 01-01-2015] and [PWD

STRUCTURAL 01-06-2020]

no.	ITEM DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
1	Excavation for All Types and sizes of foundations, trenches and drains or for any other purpose including disposal of excavated stuff upto 1.5 m lift and lead upto 50m (at least 5m away from the excavated area), including dressing and In All Types of soils.								
		6	1.50	1.50	1.30	17.55			
		1	22.00	0.40	0.50	4.40			
	Plinth Protection Work	2	6.00	1.00	0.20	2.40			
		2	4.50	1.00	0.20	1.80			
						26.15	CUM	185.00	4837.75
2	Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20 cm in depth consolidating each deposited layer by ramming and watering, including								
		6	1.50	1.50	0.10	1.35			
		1	22.00	0.40	0.10	0.88			
		1	6.50	4.50	0.60	17.55			
						19.78	CUM	371.00	7338.38
3	Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of								
i	1:4:8 (1 cement : 4 coarse sand : 8 graded stone Aggregate 40mm nominal								
		6	1.50	1.50	0.10	1.35			
		1	22.00	0.40	0.10	0.88			
	Plinth Protection Work	2	6.00	1.00	0.10	1.20			
		2	4.50	1.00	0.10	0.90			
		1	6.50	4.50	0.10	2.93			
						7.26	CUM	2659.00	19291.05
ii	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone Aggregate 20mm nominal								
	Plinth Protection Work	2	6.00	1.00	0.10	1.20			
		2	4.50	1.00	0.10	0.90			
						2.10	CUM	4073.00	8553.30
4	Providing and laying nominal mix reinforced cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work								
	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone Aggregate 20 mm nominal								
		6	1.30	1.30	0.30	3.04			
		6	0.80	0.80	0.40	1.54			
	UPTO PLINTH	6	0.30	0.20	1.00	0.36			
	PLINTH BEAM	1	22.00	0.20	0.30	1.32			
	ABOVE PLINTH	6	0.30	0.20	3.50	1.26			


	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	AM	1	32.00	0.20	0.30	1.92			
		4	1.80	0.60	0.15	0.65			
	FORM	1	12.00	0.60	0.15	1.08			
	AB BEAM	1	32.00	0.20	0.30	1.92			
	SLAB	1	7.20	5.20	0.130	4.87			
						17.95	CUM	4163.00	74739.17
5	Extra for laying PCC/RCC of any grade in superstructure above plinth level for every floor or part thereof in addition to rate for foundation and plinth					10.44	CUM	97.50	1017.43
6	Providing and placing in position reinforcement for R.C.C. work including straightening, cutting, bending, binding etc. complete as per drawings including cost of binding wire in foundation and plinth All Complete								
	Thermo-Mechanically treated bars FE 415	17.95			90.00	1615.79	Kg	54.50	88060.45
7	Providing and fixing form work including centring, shuttering, strutting, staging, propping bracing etc. complete and including its removal At All levels, for:								
a	Foundations, footings, bases of columns plinth beam, curtain wall in any shape and size and all type of wall below plinth	24	1.30	-	0.30	9.36			
		24	0.80		0.40				
		6	1.00	-	1.00	6.00			
		2	22.00		0.30	13.20			
						28.56	sqm	139.00	3969.84
b	Columns, Pillars, Piers and likes-rectangular or square in shape								
		6	1.00		3.50	21.00			
						21.00	sqm	297.00	6237.00
c	Beams, lintels, cantilevers & walls	2	32.00		0.30	19.20			
		2	32.00		0.30	19.20			
						38.40	sqm	202.00	7756.80
d	Suspended floors, roofs, access platform, balconies (plain surfaces) and	1	7.20	5.20		37.44			
		1	12.00	0.60		7.20			
		1	12.00		0.15	1.80			
						44.64	sqm	235.00	10490.40
e	Edge of slab, breaks in floor and walls upto 200mm.	1	25.00			25.00	metre	34.00	850.00
f	Weather shade, chhajja, Cornices and mouldings	4	1.80	0.60		4.32	sqm	294.00	1270.08
8	Brick work with modular fly-ash lime bricks (FaLG Bricks) confirming to IS:12894-2002 of class designation 4.0 in foundation and plinth in:								
	Cement Mortar 1:6 (1 cement : 6 coarse sand)	1	22.00	0.30	0.40	2.64			
		1	20.00	0.20	2.10	8.40			
		1	20.00	0.20	0.90	3.60			
	platform	1	30.00	0.20	0.60	3.60			
	stair	3	7.00	0.30	0.15	0.95			
		1	4.00	0.20	2.80	2.24			
		2	2.50	0.20	2.80	2.80			
		1	22.00	0.20	0.30	1.32			
	deduction								

	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
		-1	1.50	0.20	2.10	-0.63			
		-4	1.50	0.20	1.20	-1.44			
	LATOR	-6	0.90	0.45	1.20	-2.92			
						20.56	CUM	3263.00	67084.02
	Extra for brick work in superstructure above plinth level for every floor or part thereof in addition to rate for foundation and plinth:								
						13.32			
						13.32	CUM	121.00	1611.72
10	Providing and fixing steel door/ window with M.S. sheet 1mm thick, frame of angle iron, diagonal braces of angle/ flat iron of suitable size, 3.00 mm M.S. gusset plates at junctions and corners, all necessary fittings complete including applying a priming coat of red oxide zinc door								
		1	1.50	2.10	25.00	78.75			
		2	1.00	2.10	20.00	84.00			
	window	3	1.50	1.20	25.00	135.00			
						297.75	kg	75.00	22331.25
11	Providing and fixing M.S. grill of approved pattern made of M.S. flats or square or round bars welded to steel frame of windows etc. including applying a priming coat welded to frame with all necessary fitting complete including applying a priming of red oxide zinc chromate primer.								
	window	3	1.50	1.20	20.00	108.00			
		6	0.90	0.45	15.00	36.45			
						144.45	kg	67.50	9750.38
12	Providing and making 12mm thick cement plaster of mix:								
	In Cement Mortar 1:6 (1 cement : 6 fine sand)	1	32.00		3.20	102.40	sqm	91.50	9369.60
13	Providing and making 15mm thick cement plaster on the rough side of single or half brick wall of mix:								
	In Cement Mortar 1:6 (1 cement : 6 fine sand)	1	33.00		3.60	118.80	sqm	107.00	12711.60
14	Providing and applying 2mm thick ready mix exterior grade approved make putty (like Birla wall care, Altek Superfine W/R of (NCL), Asian, ICI, Nerolac, J.K. wall putty) on walls to make the surface smooth and even					221.20	sqm	94.50	20903.40
15	14.11 Wall painting with acrylic luxury emulsion (plastic) paint of required shade to give an even shade.								
	On new work (two or more coats)								
						102.40	sqm	52.50	5376.00


	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	Exterior surface with ACRYLIC exterior paint of required thickness as per manufacturer's specifications to give protective and decorative finish including cleaning washing of surface etc. complete with								
	On new work (Two or more coats applied @ 1.43 ltr/ 10 sqm over and including					118.80	sqm	56.00	6652.80
17	Painting on new work (two or more coats) to give an even shade with Satin Synthetic Enamel Paint								
		2	1.50	2.10		6.30			
		4	1.00	2.10		8.40			
		3	1.50	1.20		5.40			
		6	1.50	1.20		10.80			
		6	0.90	0.45		2.43			
						33.33	sqm	55.00	1833.15
18	Providing and laying vitrified floor tiles with double charge/ multi charge printing with water absorption less than 0.5% and conforming to IS : 15622 of approved make in all colours and shades and size mentioned below (+/- 10mm), laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand) including grouting the joints with white cement and matching pigments etc. complete.								
	Size 600x600mm	1	6.50	4.50		29.25			
		1	22.00		0.10	2.20			
						31.45	sqm	963.00	30286.35
19	15mm thick Granite work (machine cut, table rubbed & mirror polished) for kitchen platform, vanity counters, window sills and similar locations of required size laid over 20mm thick base cement mortar 1:4 (1 cement : 4 coarse sand) including joints treated with white cement mixed with matching pigment including rubbing and polishing to edge moulding to give high gloss finish.								
	Granite stone black	1	12.00	0.60		7.20			
		1	12.00	0.15		1.80			
						9.00	sqm	3279.00	29511.00
20	Providing and fixing ceramic glazed wall tiles conforming to IS : 15622 of approved make, colours, shades and size on wall and dados over 12 mm thick bed of cement Mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm including pointing in white cement mixed with								
	Size upto 200x300mm	1	12.00		1.20	14.40	sqm	587.00	8452.80
21	12.37Chequerred precast cement concrete tiles 22mm thick in footpath & courtyard jointed with neat cement slurry mixed with pigment to match the shade of tile including cleaning of joint etc complete on 20 mm thick bed of cement mortar 1:4 (1 cement :4 coarse sand) :								

	DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
	um shade using ately. 50% white cement and inary cement	3	7.00	0.30		6.30			
		3	7.00		0.15	3.15			
						9.45	sqm	591.00	5584.95
22	18.20 Providing and fixing stainless steel AISI-304(18/8) wash basin with C.I. brackets, 32 mm C.P. brass waste of standard pattern, including painting of brackets, cutting and making good the								
	Size 510x410 mm	1				1.00	each	4095.00	4095.00
23	Providing and fixing 15 mm nominal bore Brass bib/stop cock of approved quality: Bib cock (350 grams)								
						1.00	each	237.00	237.00
	Piller Cock (400 grams)								
						1.00	each	398.00	398.00
24	Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete								
	20 mm nominal bore					1.00	each	394.00	394.00
25	Providing and fixing stainless steel drain jali of approved make/quality.								
						1.00	each	51.00	51.00
26	Providing and fixing on wall face or under floor UV stabilized Unplasticised Rigid PVC pipes (single socketed) having 3.2mm wall thickness conforming to IS : 13592 (4kg/sqcm) including required couplers, jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion etc complete.								
	110 mm dia pipe.								
						12.00	metre	267.00	3204.00
27	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge.								
	CONCEALED WORK including cutting chases and making good the walls etc.								
	25 mm nominal outer dia .Pipes	1	13.20			13.20	metre	213.00	2811.60
	20 mm nominal outer dia .Pipes.	1	15.00			15.00	metre	167.00	2505.00

DESCRIPTION	N	L	B	H/D	Qty	Unit	Rate	Amount
placing on terrace (at all polyethylene water storage 12701 marked with cover and locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank	1	1000.00			1000.00	litre	7.30	7300.00
TOTAL								486866.26
For Electrification Work (P.W.D. Electrical Sor 01.06.2020)								10632.72
Writing Board								2500.00
TOTAL AMOUNT								499998.98
Say As Ammount								500000.00
05 Nos X 500000.00=								2500000.00


 Sub Engineer
 Municipal Corporation
 Korba (C.G.)


 Asst. Engineer
 Municipal Corporation
 Korba (C.G.)

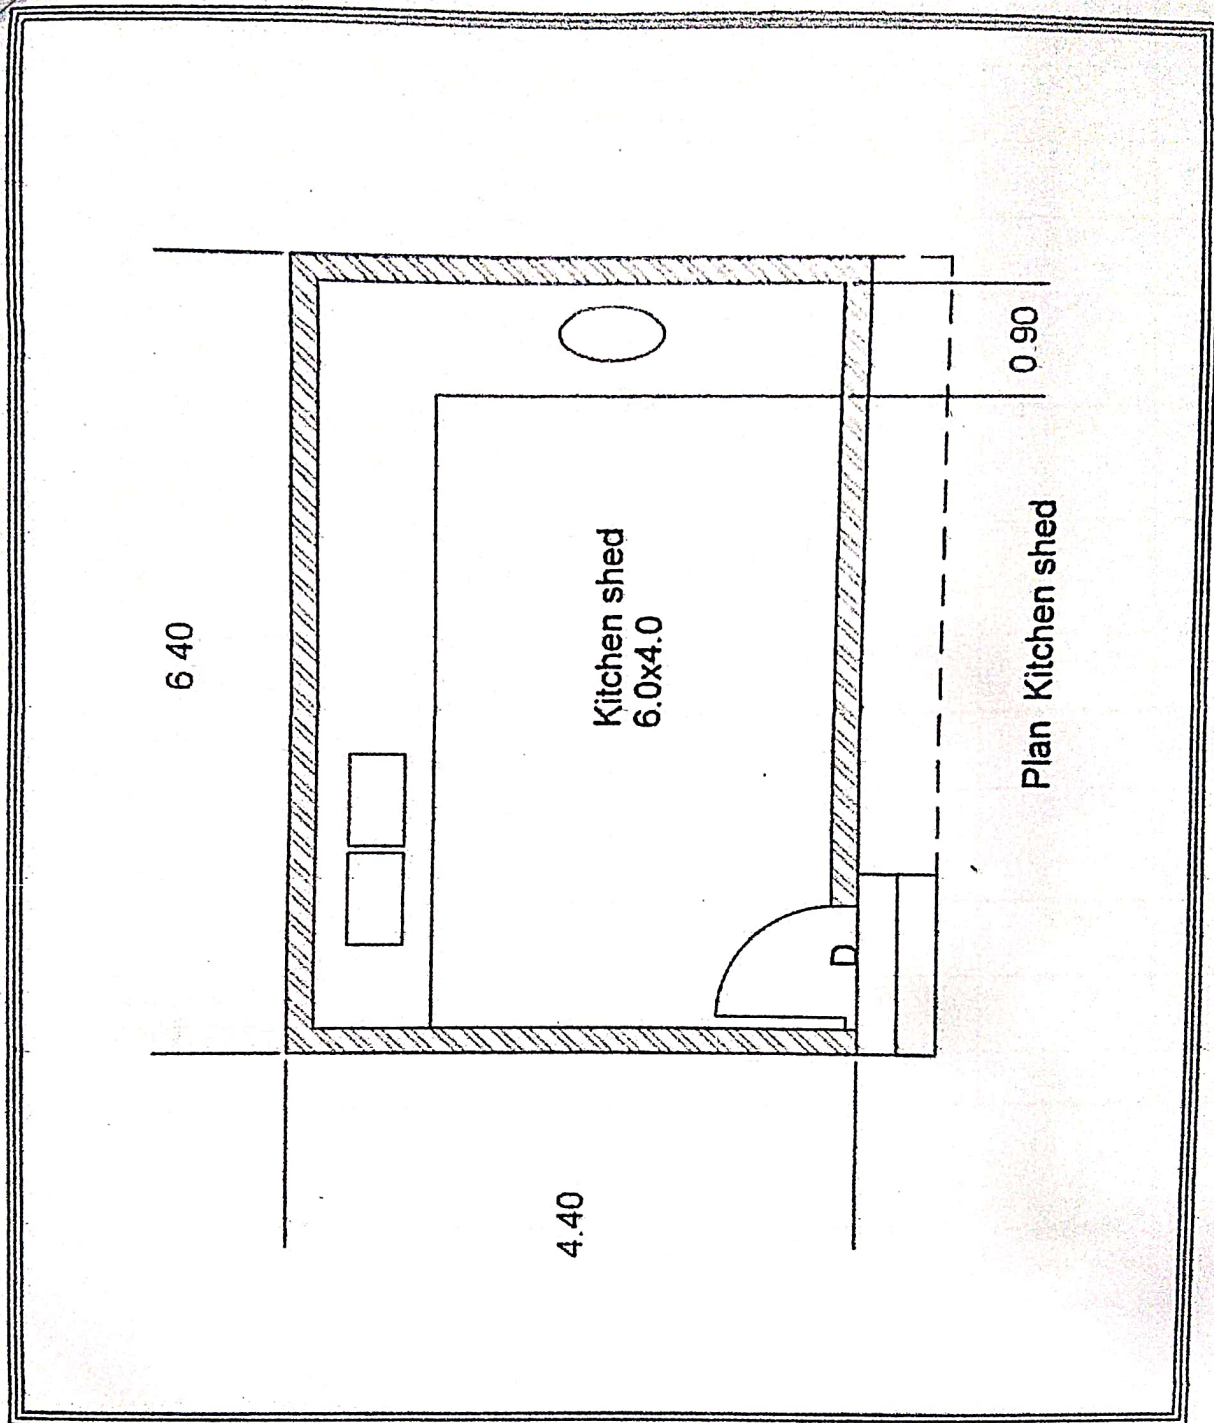

[Handwritten signature]