

कार्यालय, नगर पालिक निगम, कोरबा (छ.ग.)

फा.क./निर्माण /2018/81/

सिस्टम टेन्डर नं. 48385
ई-निविदा आमंत्रण सूचना


कोरबा, दिनांक 09/01/2019

लोक निर्माण विभाग से एकीकृत पंजीयन प्रणाली अंतर्गत सक्षम श्रेणी में पंजीकृत ठेकेदारों से निम्नलिखित कार्यों हेतु प्रमुख अभियन्ता लोक निर्माण विभाग, रायपुर द्वारा (भवन) दिनांक 01.01.2015 से प्रभावशील दर पर (निविदा खुलने के दिनांक तक समस्त संशोधनों के साथ) कम अधिक या समान दरों पर तथा शेड्यूल अनुसार आयटम दरों पर निम्नलिखित निर्माण कार्य हेतु ऑनलाईन ई-निविदा आमंत्रित की जाती है :-

क्र.	कार्य का नाम	प्राक्कलन राशि में	धरोहर राशि रु में	कार्यावधि	ठेकेदार का वर्ग	निविदा खुलने की अंतिम तिथि
1	वार्ड क 58 इमलीछापर अंतर्गत जी एवं एच. टाईप स्टाफ क्वार्टर के समीप विकास कार्य	4217000.00	32000/-	06 माह	वर्ग डी एवं प्रवर श्रेणी	01.02.2019 से

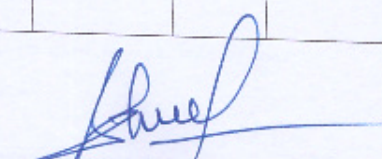
शर्तें:-

- निविदा दरे प्रचलित सी.एस.आर.से कम या अधिक प्रतिशत दरों पर दिया जावे सी.एस.आर.के अंतर्गत के आयटमों पर पृथक से आयटम दरों का उल्लेख करने पर निविदा निरस्त मानी जावेगी।
- जिन ठेकेदारों द्वारा नगर पालिक निगम (साडा) के किसी ठेके के कार्य में अनुबंध के अनुरूप कार्य न किया गया हो अथवा नगर पालिक निगम (साडा) के हित के विरुद्ध कार्य किया गया हो उन्हें निविदा भरने की पात्रता नहीं होगी।
- इच्छुक ठेकेदारों को उचित वर्ग में पंजीयन की प्रमाणित प्रतिलिपि यदि साझेदारी फर्म हो तो उसका प्रमाण पत्र (पार्टनरशीप डीड) की सत्य प्रतिलिपि, पूर्व में इस प्रकार के किये गये कार्यों की प्रमाणित सूची, उपलब्ध तकनीकी अमले की जानकारी, आयकर प्रमाण पत्र/पैन नम्बर, **जी.एस.टी.** पंजीयन प्रमाण पत्र एवं अमानत राशि ऑनलाईन जमा करना अनिवार्य होगा, प्रशिक्षित यंत्री नियुक्त करने संबंधी प्रमाण पत्र, कर्मचारी भविष्य निधि रायपुर से पंजीकरण का कोड एवं धरोहर राशि का **स्केन कापी ऑन लाईन सिस्टम पर अपलोड करना अनिवार्य होगा।**
- सम्पूर्ण किये गये कार्यों के लिए प्रत्येक चल देयकों में से 5 प्रतिशत सुरक्षा राशि 01 वर्ष के लिए एवं 5 प्रतिशत परफार्मेंस सिक्युरिटी की गारंटी के रूप में से 03 वर्ष के लिए रोकी जावेगी।
- निविदा उन्हीं ठेकेदारों को प्रदाय किये जावेंगे जो कि कर्मचारी भविष्य निधि संगठन एवं कर्मचारी राज्य बीमा निगम, रायपुर से पंजीयन कराकर कोड प्राप्त कर लिया हो अन्यथा निविदा प्रदाय नहीं किया जावेगा।
- निविदाकार को प्रत्येक निविदा में पंजीयन क्षमता के अंतर्गत वर्तमान में नगर निगम या अन्य विभागों में किये जा रहे कार्यों का विवरण राशि सहित मूलप्रति में **निविदा जारी तिथि से 10 दिवस पूर्व का नोटरी सत्यापित** शपथपत्र देना अनिवार्य होगा।
- निविदा में भाग लेने वाले ठेकेदारों को छ.ग. भवन और अन्य सन्निर्माण कर्मकार (नियोजन एवं सेवा शर्तों का विनियमन) अधिनियम 1996 एवं तदंतर्गत निर्धारित नियमों के तहत पंजीयन कराना आवश्यक होगा तथा निर्माण लागत का **1 प्रतिशत उपकर** के रूप में प्रत्येक देयक से कटौती की जावेगी।
- ईट से संबंधित निर्माण कार्यों में फ्लाइंग एश ब्रिक का उपयोग किया जाना अनिवार्य होगा।
- कार्य में उपयोग हेतु 43 ग्रेड ओ.पी.सी. सीमेंट की खरीदी ठेकेदारों को स्वयं करनी होगी।
- प्रयुक्त लोहा का बिल एवं टेस्ट रिपोर्ट तथा प्रयुक्त सीमेंट का बिल संलग्न करना अनिवार्य होगा।
- निविदा दरों असामान्य कमी प्रतीत होने पर सफल निविदा दाता से अनुबंध के पूर्व एस.ओ.आर. एवं निविदा दर की अंतर की राशि के समतुल्य परफार्मेंस गारंटी के रूप में राष्ट्रीयकृत बैंक एफ.डी.आर., पोस्ट ऑफिस, टाईम डिपोजिट अथवा एन.एस.सी. जो कि आयुक्त नगर पालिक निगम, कोरबा के नाम पर देय होगा जो मांग तिथि से **15 दिवस** के भीतर जमा करना अनिवार्य होगा। उपरोक्त राशि समयावधि में जमा न करने की दशा में निविदा स्वमेव निरस्त मानी जावेगी।
- निविदा अहस्तांतरणीय होगा एवं सशर्त निविदाओं पर विचार नहीं किया जावेगा।
- निविदा के संबंध में किसी प्रकार की विवाद होने की स्थिति में आयुक्त का निर्णय अंतिम एवं सर्वमान्य होगा।
- निविदा स्वीकृत करने अथवा अस्वीकृत करने अथवा निरस्त करने का अधिकार नगर पालिक निगम के पास सुरक्षित रहेगा।
- उपरोक्त निविदा सूचना की विस्तृत प्रति नगर पालिक निगम, कोरबा के साकेत भवन स्थित निर्माण शाखा से प्राप्त किये जा सकते हैं।


कार्यपालन अभियन्ता
नगर पालिक निगम
कोरबा (छत्तीसगढ़)

Date-Time Detail(s)

Seq. No.	Nagar Nigam Stage	Contractor Stage	Start		Expiry		Remarks
			Date	Time	Date	Time	
1	Release Tender		09.01.19	13.00	09.01.19	13.00	Release Tender
2		Bid Submission	09.01.19	13.00	31.01.19	17.30	
3	Tender Open		01.02.19	10.30	--	--	


EXECUTIVE ENGINEER
KORBA (CG)
For, Commissioner Korba (C.G.)

OFFICE OF THE MUNICIPAL CORPORATION, KORBA (C.G.)

DETAILED ESTIMATE

Name of work:-Development of Near G & H type Staff Quarter at ward no 58 Imlichhapar

SOR:- Schedule of rates public works department[PWD BUILDING-01-01-2015]

S. N.	SOR Ref.	DESCRIPTION	NO	L	B	D/H	QTY	UNIT	RATE	AMOUNT		
1	1.1	Excavation for all types and sizes of foundations, trenches and drains or for any other purpose including disposal of excavated stuff upto 1.5 m lift and lead upto 50m (at least 5m away from the excavated area), including dressing and leveling of pits.										
		1 In all types of soil										
		boundry wall column	92	1.20	1.20	1.20	158.98					
			88	1.80	0.40	0.40	25.34					
		drain	1	190.0	1.10	1.00	209.00					
			1	40.00	7.00	0.20	56.00					
			2	25.00	7.00	0.20	70.00					
			1	40.00	7.00	0.20	56.00					
			8	10.00	5.00	0.40	160.00					
			1	70.00	1.00	0.60	42.00					
							Total=	777.32	Cum	185.00	143804.20	
2	1.18	Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering, including dressing etc. complete.										
		boundry wall column	92	1.20	1.20	0.10	13.25					
		drain	1	190.00	1.10	0.10	20.90					
			2	40.00	2.00	0.15	24.00					
			4	25.00	2.00	0.15	30.00					
			2	40.00	7.00	0.15	84.00					
			1	12.00	4.00	0.15	7.20					
			1	70.00	1.00	0.10	7.00					
							Total=	186.35	Cum	371.00	69135.11	
3	2.1	Providing and fixing formwork including centering, shuttering, strutting, staging, propping bracing etc. complete and including its removal at all levels, for.										
		1 Foundations, footings, base of columns and plinth beam in any shape and size.										
			92x4	1.20		0.25	110.40					
			92x4	0.80		0.35	103.04					
			2	190.00		0.15	57.00					
			4	190.00		0.60	456.00					
			92x2	0.20		0.40	14.72					
			92x2	0.30		0.40	22.08					
			2	290.00		0.30	174.00					
			6	8.00		1.20	57.60					
							Total=	994.84	Sqm	139.00	138282.76	
		5	Columns, Pillars, Piers and likes- rectangular or square in shape									
				above plinth	92x2	0.20		1.80	66.24			
					92x2	0.30		1.80	99.36			
									Total=	165.60	Sqm	297.00

3.	Providing and laying nominal mix cement concrete with crushed stone aggregate using concrete mixer in foundation, plinth and above ground level excluding cost of form work.												
3	1:4:8 (1 cement : 4 coarse sand : 8graded stone aggregate 40mm nominal size).												
	boundry wall column	106	1.20	1.20	0.10	15.26							
		97	1.80	0.40	0.10	6.98							
	drain	1	190.00	1.10	0.10	20.90							
		1	40.00	7.00	0.10	28.00							
		2	25.00	7.00	0.10	35.00							
		1	40.00	7.00	0.10	28.00							
		1	70.00	1.00	0.10	7.00							
						Total=	141.15	Cum	2659.00			375312.53	
5	3.10 Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work.												
5	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20mm nominal size).												
		1	40.00	3.60	0.15	21.60							
		2	25.00	3.60	0.15	27.00							
		1	40.00	3.60	0.15	21.60							
		1	20.50	4.00	0.10	8.20							
		1	290.00	0.20	0.05	2.90							
						Total=	81.30	cum	4073.00			331134.90	
6	7.5 Brick work with modular fly-ash lime bricks (FaLG Bricks) confirming to IS:12894-2002 of class designation 4.0 in foundation and plinth in:												
3	Cement Mortar 1:5 (1 cement : 5 coarse												
		91	1.80	0.20	0.40	13.10							
		91	2.90	0.20	1.50	79.17							
		2	40.00	0.20	0.60	9.60							
		2	25.00	0.20	0.60	6.00							
		1	65.00	0.20	0.80	10.40							
						Total=	118.27	Cum	3350.00			396217.90	
7	3.2 Providing and laying nominal mix reinforced cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work.												
1	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20mm nominal size).												
	boundary wall Raft	92	1.10	1.10	0.25	27.83							
		92	0.80	0.80	0.35	20.61							
	below plinth	92	0.20	0.30	0.30	1.66							
	above plinth	92	0.20	0.30	1.50	8.28							
	plinth beam	1	290.00	0.20	0.30	17.40							
	tow wall	1	70.00	0.20	0.30	4.20							
		1	70.00	0.20	1.20	16.80							
	drain	1	190.00	1.10	0.15	31.35							
	wall	2	190.00	0.20	0.60	45.60							
	precast slab	85	1.10	0.60	0.15	8.42							
						Total=	182.14	Cum	4163.00			758244.66	


3.12	Providing and placing in position reinforcement for R.C.C. work including straightening, cutting, bending, binding etc. complete as per drawings including cost of binding wire in foundation and plinth all complete:								
1	Thermo-Mechanically treated bars FE 415	80	per		Total=	14571.12	Kg	54.50	794126.04
9.11.2	Providing and making 12mm thick cement plaster of mix: In Cement Mortar 1:5 (1 cement : 5 fine sand)								
		1	290.00		2.10	609.00			
		1	40.00		1.20	48.00			
		1	25.00		1.20	30.00			
					Total=	687.00	Sqm	96.50	66295.50
10.11.3	Providing and making 15mm thick cement plaster on the rough side of single or half brick wall of mix: In Cement Mortar 1:5 (1 cement : 5 fine sand)								
3		1	290.00		2.10	609.00			
		1	40.00		1.20	48.00			
		1	25.00		1.20	30.00			
					Total=	687.00	Sqm	113.00	77631.00
11.14.14	Finishing walls with water proofing cement paint of required shade to give an even shade.								
1	On new work (Two or more coats applied @ 3.84 kg/10 sqm)				Total=	1374.00	Sqm	41.00	56334.00
12.12.65	Providing & laying 60mm thick precast interlocking concrete blocks of approved size (approx 305 sqcm) and shape/pattern, over 40 mm thick average complete coarse sand bed with joints of 3mm thick filled by fine sand including leveling with surface vibrator, temping and sweeping etc. complete of minimum compressive strength of 250 kg/sq.cm								
2	Pigment Coloured (rubber mould) precast interlock concrete blocks								
		2	40.00	4.00		320.00			
		2	25.00	4.00		200.00			
		1	23.50	18.00		423.00			
					Total=	943.00	Sqm	632.00	595976.00
13.1.9	Extra rate for lead for every 50m lead or part thereof and upto 150 m beyond 50 m free lead and 1.5 m free lift by manual means only.								
1	For Soils(Extra lead 150 m)					306.00	Cum	99.00	30294.00
14.1.17	Filling from available excavated stuff (Excluding rock) in trenches, plinth, sides of foundation etc. in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering with a lead upto 50 M. and lift upto 1.5 M.					471.32	Cum	65.00	30635.80
15.9.6	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of red oxide zinc chromate primer.								
1	In stringers, treads, landings etc. of stair cases including use of chequered plate wherever required, all complete.					606.00	kg	70.00	42420.00


17	22.2	Supplying and stacking of good earth at site including royalty, loading, unloading and carriage upto 5 km (earth measured in stacks will be reduced by 20% for payment).	1	40.00	40.00	0.30	480.00	CUM	201.00	96480.00
18	22.4	Supplying and stacking at site well decayed cow dung manure from approved source, including loading, unloading and carriage upto 5 km (manure measured in stacks will be reduced by 8% for payment).	1	40.00	25.00	0.05	50.00	CUM	236.00	11800.00
19	22.25	Providing and planting following herbs in garden including preparation of soil, base plantation, providing and spreading different fertilizers, soil and sand:								
	1	Hedges like Alife, Dorenta, Tikoma etc	1	320.00			320.00	nos	14.00	4480.00
	3	Hibiscus (Flower)/ Rose	1	220.00			220.00	nos	26.50	5830.00
20	22.1	Grassing with 'Doob' grass including watering and maintenance of the lawn for 30 days or more till the grass forms a thick lawn free from weeds and fit for mowing including supplying good earth if needed (the good earth shall be paid for separately).								
	3	In rows 5 cm apart in either direction.	1	40.00	40.00		1600.00			
			2	18.00	15.00		540.00			
							Total=	2140.00	CUM	6.60
										14124.00
21	19.7	Providing and fixing on wall surface G.I. pipes medium class complete with G.I. fittings and clamps, including cutting, making good the walls etc. and testing of joints complete:								
	3	25 mm dia nominal bore	1	165.00			165.00	Rmt	258.00	42570.00
	2	20 mm dia nominal bore	1	95.00			95.00	Rmt	185.00	17575.00
	1	15 mm dia nominal bore	1	85.00			85.00	Rmt	149.00	12665.00
	26.5.6	Supplying and fixing GL pipe B Class 32 mm dia	1	10.00			10.00	nos	298.00	2980.00
	26.11	Supplying inxing and commisioning of 1-3 HP 1 phase starter	1				1.00	nos	4125.00	4125.00
	26.14	Supplying and fixing following sizw submersible cable 3x2.5 sq.m	1	190.00			190.00	Rmt	67.50	12825.00


TOTAL= 4217281.60

4217281.60

SAY RS.= 4217000.00


E.E. Engineer
Municipal Corporation
Korba (C.G.)


Asstt. Engineer
Municipal Corporation
Korba (C.G.)


Sub Engineer
Municipal Corporation
Korba (C.G.)